



Product specifications



Professional range

TURBO CLEANER

Wynn's Turbo Cleaner cleans and unblocks dirty turbochargers.

When spraying, it produces a foam, which has a long lasting cleaning effect on the surface of the turbo.

Properties

- ✓ Cleans and unblocks dirty turbocharger geometry with or without dismantling.
- ✓ Dissolves gum, lacquer, tar, carbon and varnish.
- ✓ Restores turbo power to its original activity.
- ✓ Regains optimal air/fuel ratio.
- ✓ Harmless to exhaust gas after-treatment systems.

Applications

- ✓ For all diesel and petrol turbo engines.

Directions

A. *Cleaning the turbo (inlet side) without disassembly*

1. Start the engine and let it warm up. Remove the flexible hose in the intake system, located between the air filter box and turbocharger / intercooler
2. For petrol engines run the engine up to 2000 rpm. For diesel engines let the engine idle, NEVER throttle.
3. With a warm engine, spray the product into the inlet side of the turbo.
4. Spray Wynn's Turbo Cleaner in short intervals to avoid a spontaneous increase of rpm and engine knock.
5. After each spraying wait for the rpm to set back to the original level.
6. If necessary, throttle for petrol engines to avoid stalling. For diesel engines NEVER throttle.



Wynn's Belgium bvba – Industriepark West 46 – B-9100 Sint-Niklaas / Belgium
 Tel: 32-3-766.60.20 - Fax: 32-3-778.16.56 – E-mail: mail@wynns.eu – Website: www.wynns.com


The data concerning properties and applications of the indicated products are offered in good faith and are based on our research and practical experiences. Due to the versatility of the application possibilities, it is impossible to mention all details and we do not assume any obligations or responsibilities resulting from this. When a new edition appears due to the technical development, the preceding data are no longer valid.



7. Continue until the 200 ml product in the aerosol is used.
8. Let the engine idle for a few minutes. Stop the engine. Reconnect the air-intake hose.
9. Start engine, throttle the engine 5 to 10 times (maximum 3000 rpm), or drive 5 to 10 km with the car (do not exceed 3000 rpm).
10. Let the engine run at least another minute before stopping.

B. Cleaning a very dirty turbo (inlet and outlet side) with disassembly

1. Disassemble the turbocharger.
2. Remove the turbo in such a way that the variable geometry is visible.
3. Spray all parts well. Allow the product to soak several minutes.
4. Spray again on the parts until all dirt is removed.
5. It may help to use a rag or a piece of tissue to remove the dirt.
6. Dry the parts with compressed air, rag or tissue. Check visually for mechanical defects.
7. Mount the turbo, with new gaskets.

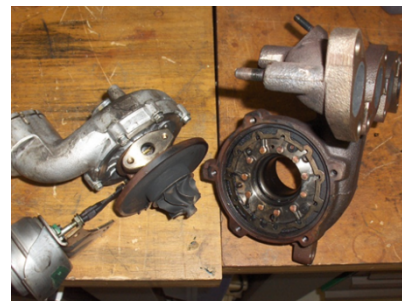

After this clean-up with Wynn's Turbo Cleaner with or without disassembly, it is advised to take away the cause of this dirt build-up by using following fuel additives:

For petrol cars:

Wynn's Petrol Extreme Cleaner (W29392 or W29393) and Petrol EGR Extreme Cleaner (W29879)

For diesel cars:

Wynn's Diesel Extreme Cleaner (W12292 or W12293) and Diesel EGR Extreme Cleaner (W23379)

Packaging

PN 28679 – 12x200 ml – EN/FR/DE/ES/IT/NL/RU/EL

Wynn's strives for high quality standards and updates its products according to the latest motor technologies and requirements.

Wynn's Belgium bvba – Industriepark West 46 – B-9100 Sint-Niklaas / Belgium
 Tel: 32-3-766.60.20 - Fax: 32-3-778.16.56 – E-mail: mail@wynns.eu – Website: www.wynns.com

The data concerning properties and applications of the indicated products are offered in good faith and are based on our research and practical experiences. Due to the versatility of the application possibilities, it is impossible to mention all details and we do not assume any obligations or responsibilities resulting from this. When a new edition appears due to the technical development, the preceding data are no longer valid.